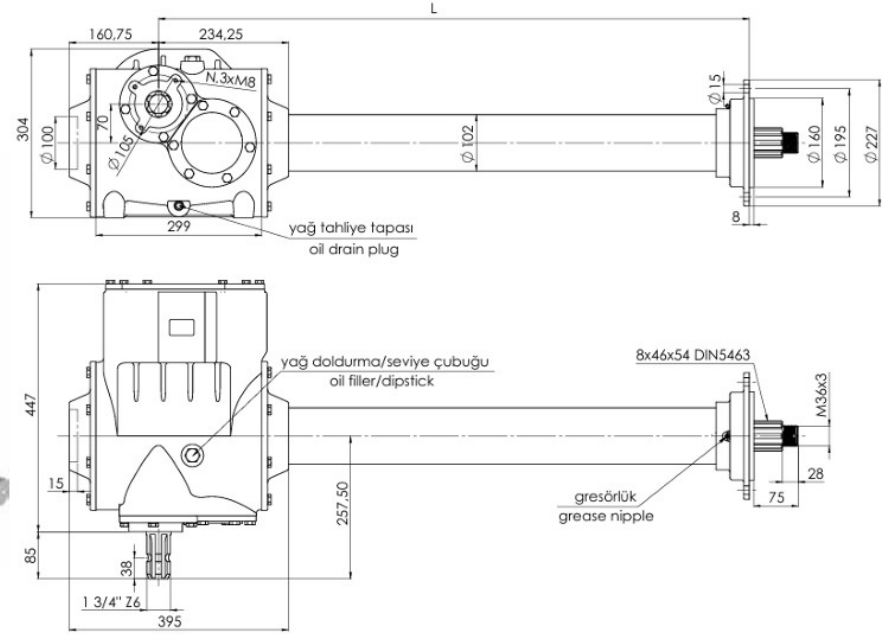
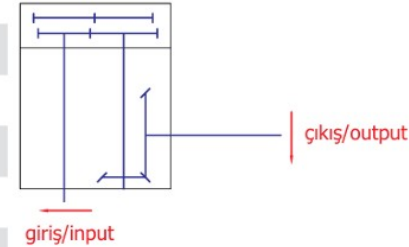


RK010**ROTARY TILLER****ÖZELLİKLER / SPECIFICATIONS**

Vites / Gearshift	1. Vites First Gear	2. Vites Second Gear	3. Vites Third Gear	4. Vites Fourth Gear
Dişli Düzeni / Gear Arrangement	21-17	20-19	19-20	17-21
i Çevrim Oranı / Gear Ratio	2,66 : 1	2,26 : 1	2,04 : 1	1,74 : 1
n ₁ Giriş Devri / Input Speed	540 r.p.m.			
n ₂ Çıkış Devri / Output Speed	203 r.p.m.	238 r.p.m.	264 r.p.m.	310 r.p.m.
P ₁ Giriş Gücü / Input Power	130 HP / 97 kW			
M ₂ Çıkış Torku / Output Torque	4338 Nm	3700 Nm	3335 Nm	2840 Nm
Yağ Cinsi / Oil Grade	SAE 90 / SAE 140			
V Yağ Hacmi / Oil Volume	7 Lt.			
A Kullanım Alanı / Usage Area	Rotovator / Rotary Tiller			
L İsteğinize göre üretilebilir / Produçible according to the your request				

**Dişli Düzeni
GEAR ARRANGEMENT**

Rotovator / Rotary Tiller	
Çalışma Geniřlięi Working Width	L
350 cm	1750 mm
400 cm	2000 mm