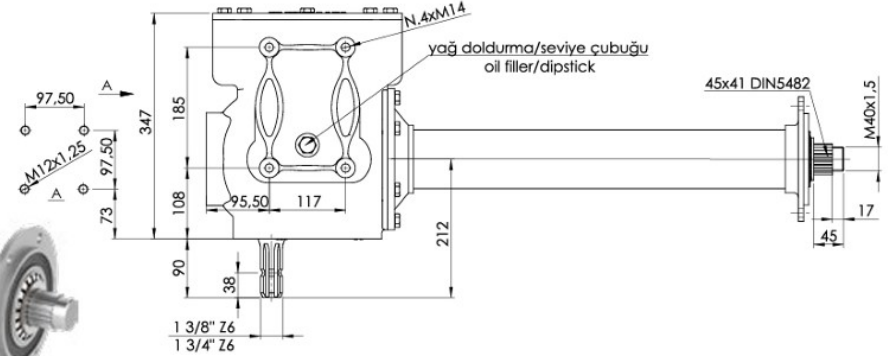
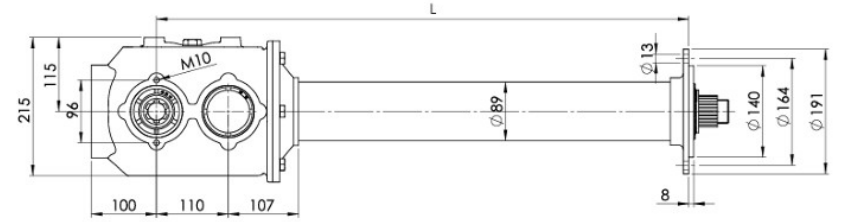
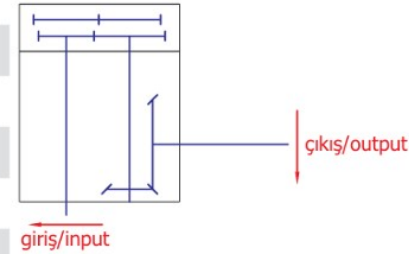


RK005**ROTARY TILLER****ÖZELLİKLER / SPECIFICATIONS**

Vites / Gearshift	1. Vites First Gear	2. Vites Second Gear	3. Vites Third Gear	4. Vites Fourth Gear
Dişli Düzeni / Gear Arrangement	19-16	18-17	17-18	16-19
i Çevrim Oranı / Gear Ratio	2 : 1	1,79 : 1	1,59 : 1	1,42 : 1
n ₁ Giriş Devri / Input Speed	540 r.p.m.			
n ₂ Çıkış Devri / Output Speed	269 r.p.m.	301 r.p.m.	338 r.p.m.	379 r.p.m.
P ₁ Giriş Gücü / Input Power	65 HP / 48 kW			
M ₂ Çıkış Torku / Output Torque	1637 Nm	1463 Nm	1303 Nm	1162 Nm
Yağ Cinsi / Oil Grade	SAE 90 / SAE 140			
V Yağ Hacmi / Oil Volume	3,50 Lt.			
A Kullanım Alanı / Usage Area	Rotovator / Rotary Tiller			
L İsteğinize göre üretilebilir / Producibile according to the your request				

**Dişli Düzeni
GEAR ARRANGEMENT**

Sabit Rotovator / Fixed Rotary Tiller	
Çalışma Geniřlięi Working Width	L
180 cm	790 mm
210 cm	915 mm
240 cm	1040 mm

Hidrolik Kaydırmalı Rotovator Hydraulic Side Shifting Rotary Tiller	
Çalışma Geniřlięi Working Width	L
180 cm	683 mm
210 cm	808 mm
240 cm	808 mm